


Shipping Label - Asia

ASA005 4"x2" [101.6mm x 50.8mm]

DATA SHEET

Description

This label comprises a top layer white woodfree coated paper with a satin finish and high opacity with excellent smoothness for high quality label which require brilliant multicolor print. The adhesive layer comprises a permanent acrylic dispersion adhesive. The label is printable by all conventional printing process, suitable for foil stamping, varnishing and thermal transfer.

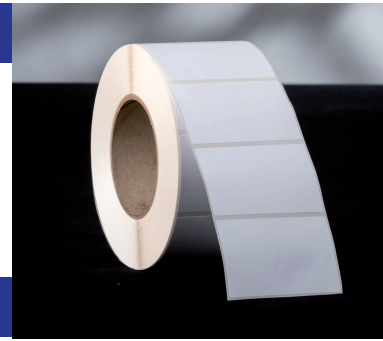

Physical Properties

| | |
|-------------------------|---|
| Facestock Composition | White Woodfree Coated Paper |
| Thickness | 71 $\mu\text{m} \pm 3$ |
| Basic Weight | 80 gsm ± 2 |
| Opacity | 89% |
| Adhesive Composition | Permanent hotmelt dispersion adhesive |
| Loop tack | Very High |
| Final Adhesion | High |
| Release Liner | Siliconised supercalandered white glassine |
| Release Liner Thickness | 53 $\mu\text{m} \pm 10\%$ |
| Release Force | Medium |
| Min. Application Temp. | 41°F (5°C) |
| Service Temp. | -20°C to 80°C |
| Storage Stability | One year stored at 23 $\pm 3^\circ\text{C}$ and 50 $\pm 5\%$ RH |
| Packaging | Label roll in 3" paper core and wrap with single shrink film |

Adhesive Application Guide

| | | |
|-----------------|----------|-----------------|
| Polycarbonate • | ABS • | Cleanroom Paper |
| Polyester • | Rubber • | Carton Box • |
| Polyethylene • | Glass • | |
| Polypropylene • | Metal • | |